



US009534945B2

(12) **United States Patent**
Vander Horst

(10) **Patent No.:** **US 9,534,945 B2**
(45) **Date of Patent:** ***Jan. 3, 2017**

(54) **ROTARY VALVE MULTI-TANK INDIRECT
LIQUID LEVEL MEASUREMENT SYSTEM
AND METHOD FOR WASTEWATER TANKS
IN A RECREATIONAL VEHICLE**

(71) Applicant: **John Vander Horst**, Littleton, CO (US)

(72) Inventor: **John Vander Horst**, Littleton, CO (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 69 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/545,056**

(22) Filed: **Mar. 20, 2015**

(65) **Prior Publication Data**

US 2015/0198475 A1 Jul. 16, 2015

Related U.S. Application Data

(63) Continuation-in-part of application No. 13/573,541, filed on Sep. 21, 2012, now Pat. No. 9,134,163.

(51) **Int. Cl.**
G01F 23/14 (2006.01)
G01F 23/00 (2006.01)

(52) **U.S. Cl.**
CPC **G01F 23/14** (2013.01); **G01F 23/00** (2013.01)

(58) **Field of Classification Search**
CPC G01F 23/14; G01F 23/00
USPC 73/302
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

867,994 A	10/1907	Murphy	
1,294,939 A *	2/1919	Murphy	G01F 23/167 73/302
1,623,832 A	4/1927	Durant	
1,670,207 A	5/1928	Murphy	
2,518,484 A *	8/1950	Matthews	G01F 23/165 73/302
3,587,316 A	6/1971	Kapteyn	
4,064,752 A *	12/1977	Murphy, Jr.	G01F 23/167 73/302
4,147,893 A *	4/1979	Matson	B67D 7/06 379/106.07
4,665,746 A *	5/1987	Sheppard	G01F 23/167 137/625.46
5,207,251 A	5/1993	Cooks	
5,484,336 A	1/1996	McConnell	
6,467,343 B1	10/2002	Baird	
6,510,736 B1	1/2003	Van Ee	
7,389,688 B1	6/2008	Vander Horst	

* cited by examiner


Primary Examiner — Hezron E Williams

Assistant Examiner — Marrit Eyassu

(57) **ABSTRACT**

A multi-tank indirect liquid level measurement device and method for wastewater tanks in a recreational vehicle may be implemented using a sealable reservoir that holds pressurized air, a manual piston pump that supplies and/or pressurizes the air in the reservoir, a rotary valve that incorporates a selection disk with an axial passage that is rotationally coupled to a connection disk that has a plurality of pipes, each of which connect on their other end to the wastewater tanks to be gaged. A bourdon tube pressure gage displays the pressure difference between the sealable reservoir and atmospheric pressure, which is an indirect reading of the height of the wastewater in the tank being gaged.

20 Claims, 11 Drawing Sheets

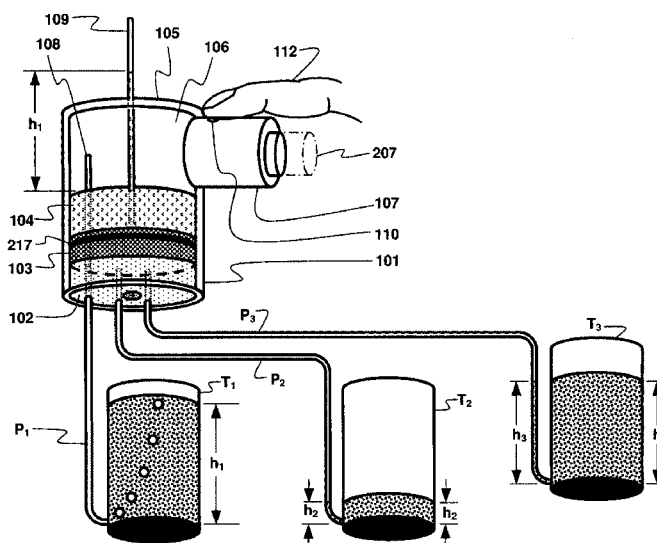

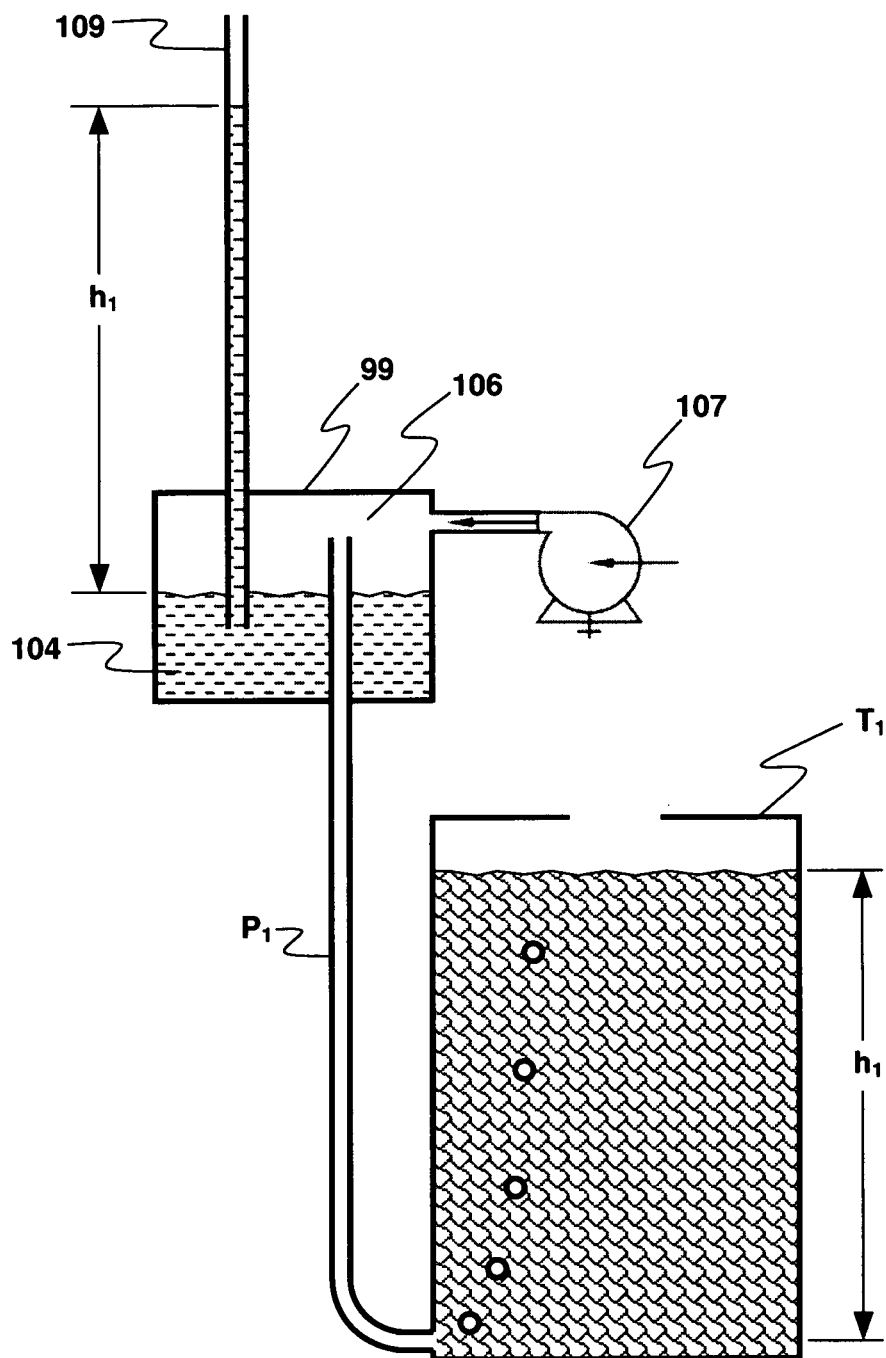


Fig. 1 (Prior Art)

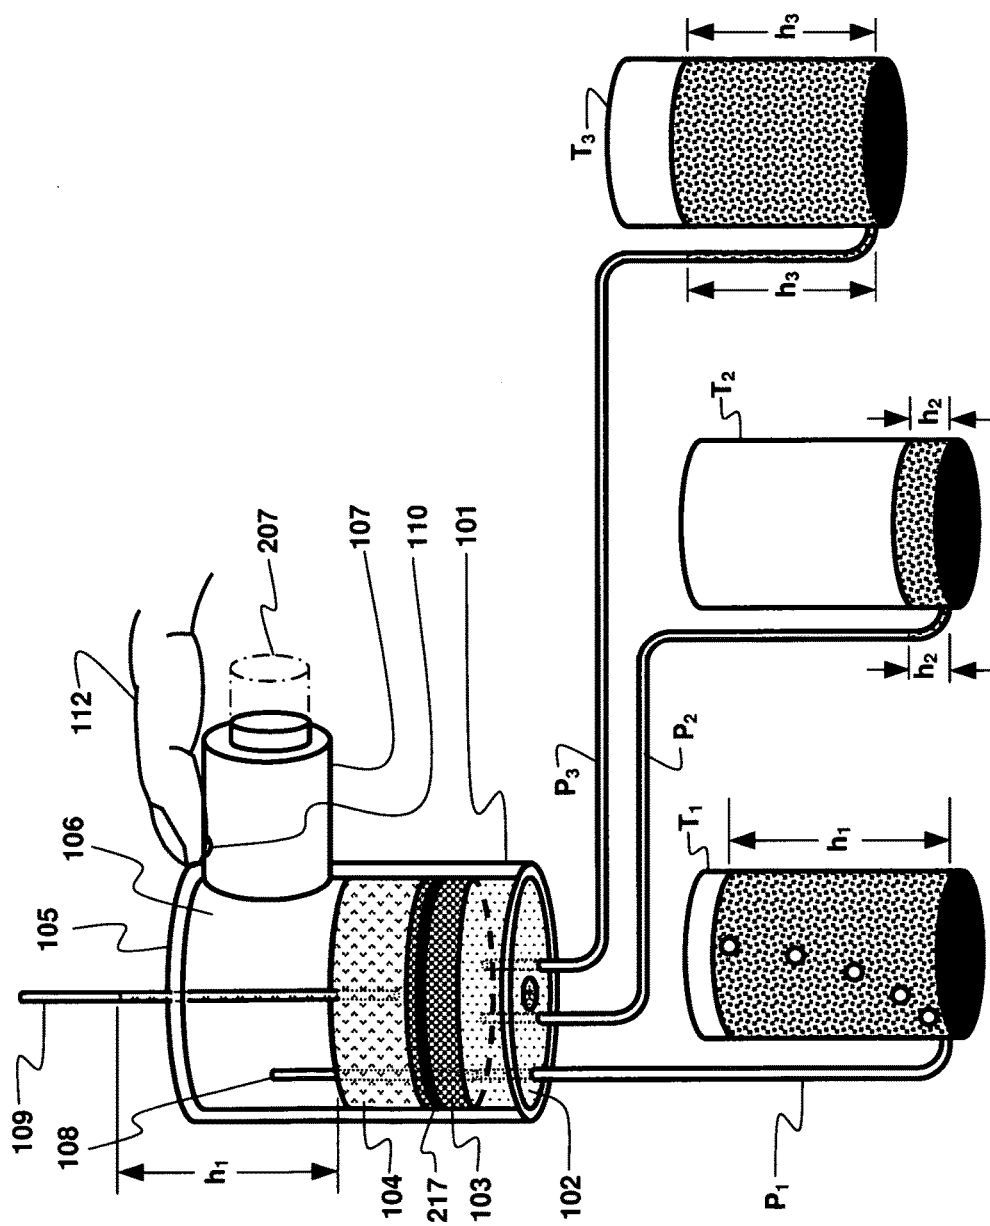


Fig. 2

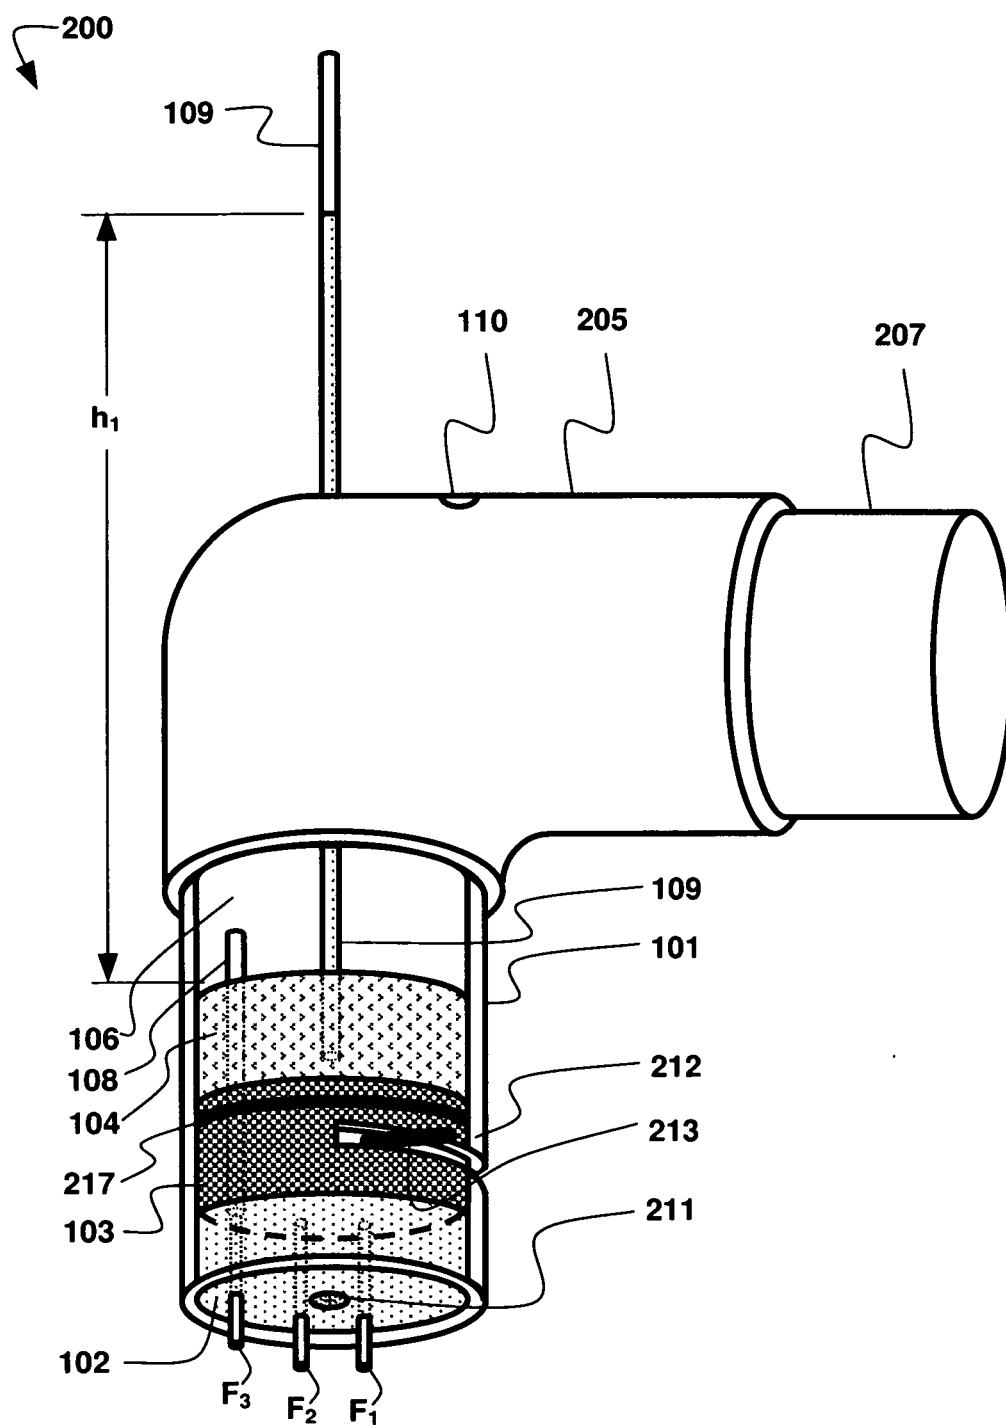


Fig. 3

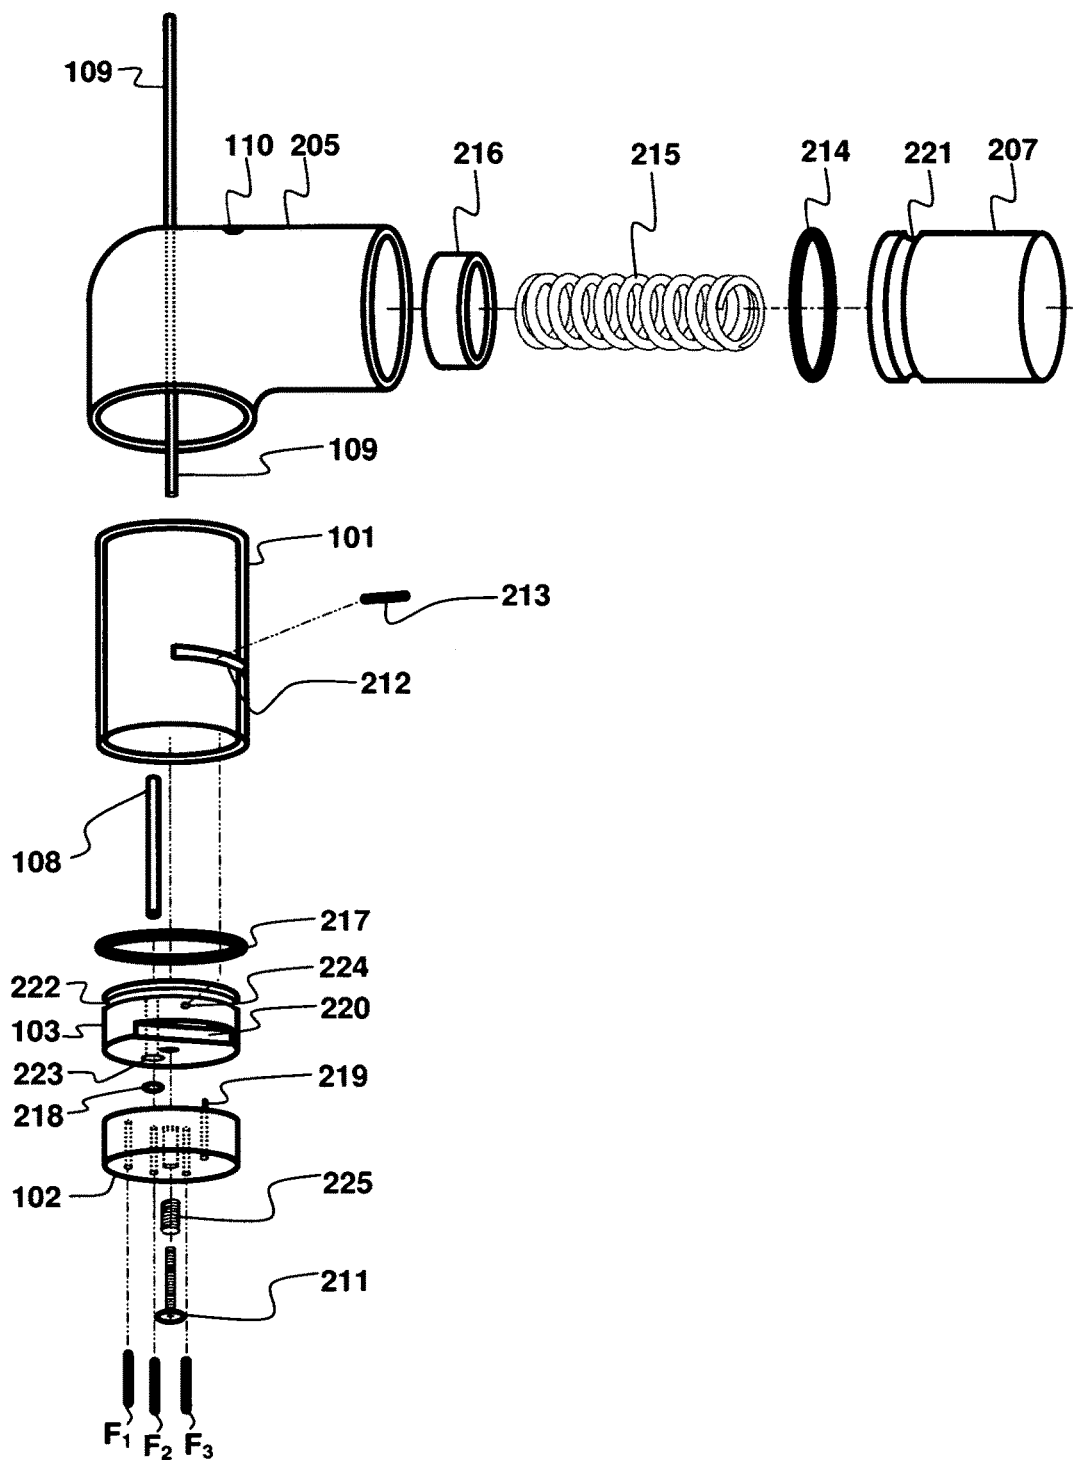


Fig. 4

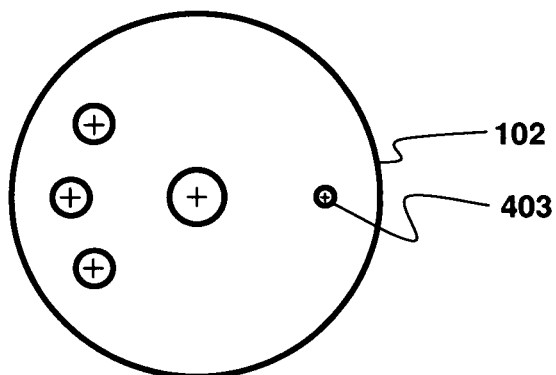


Fig. 5a

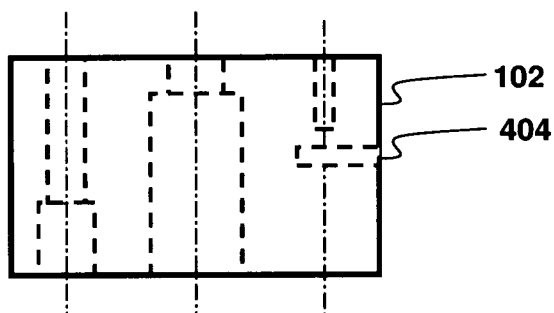


Fig. 5b

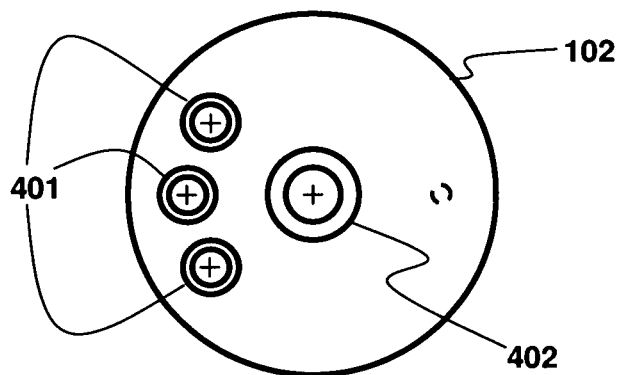


Fig. 5c

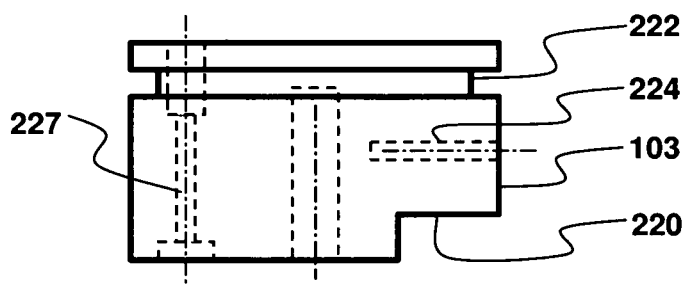


Fig. 6a

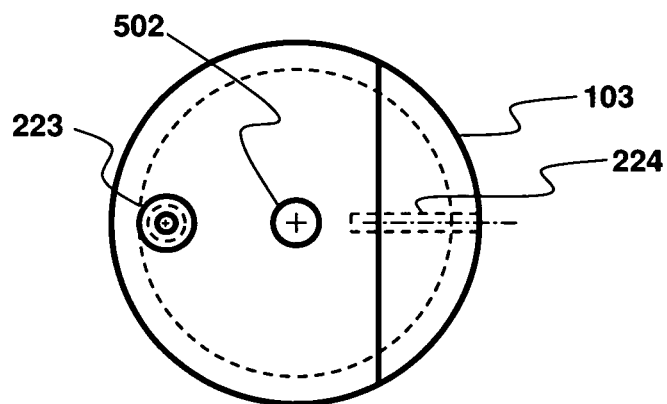
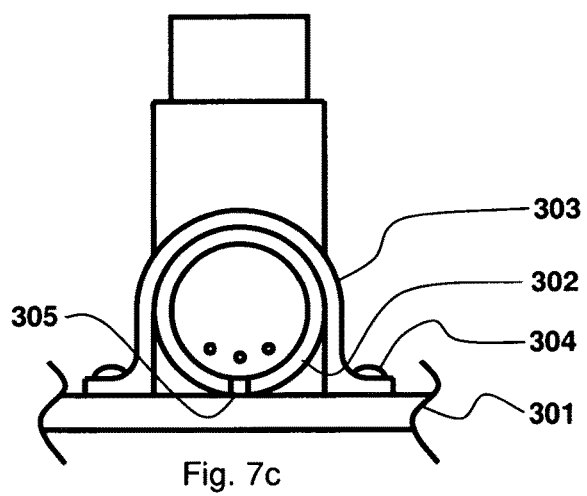
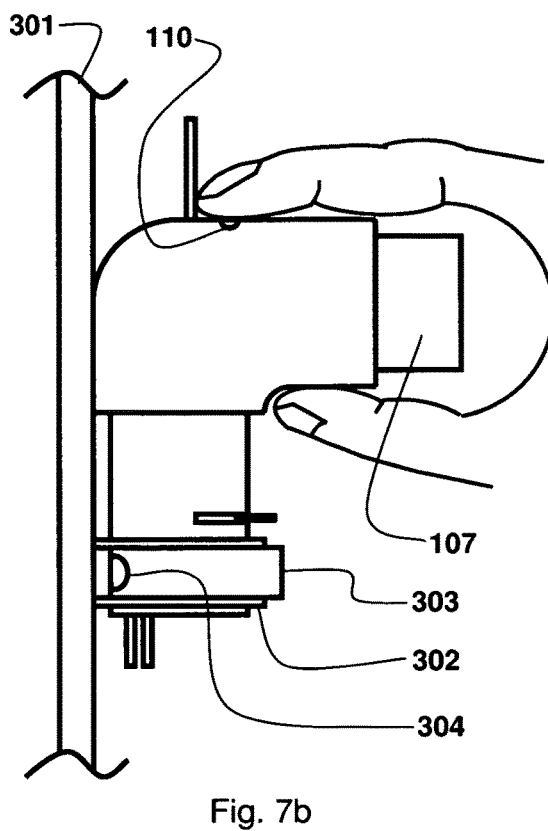
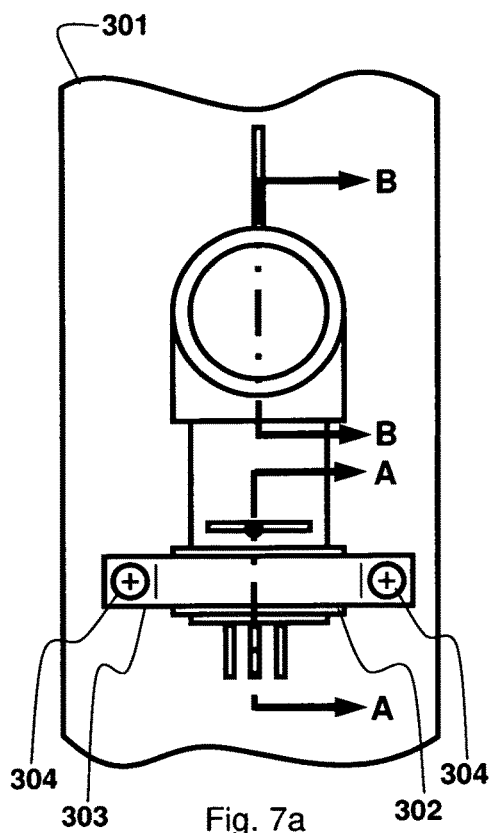


Fig. 6b



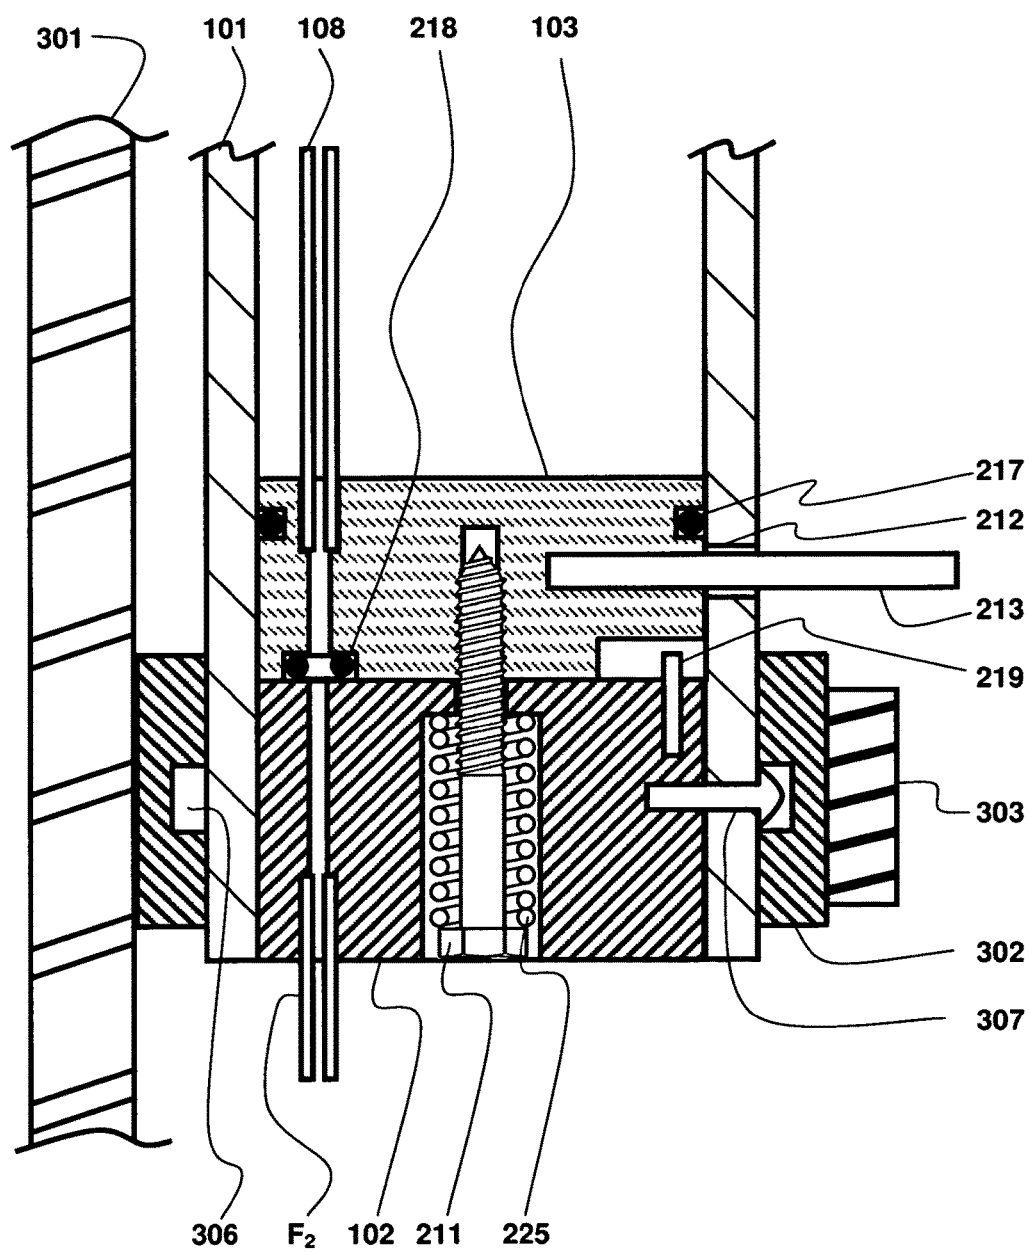


Fig. 8

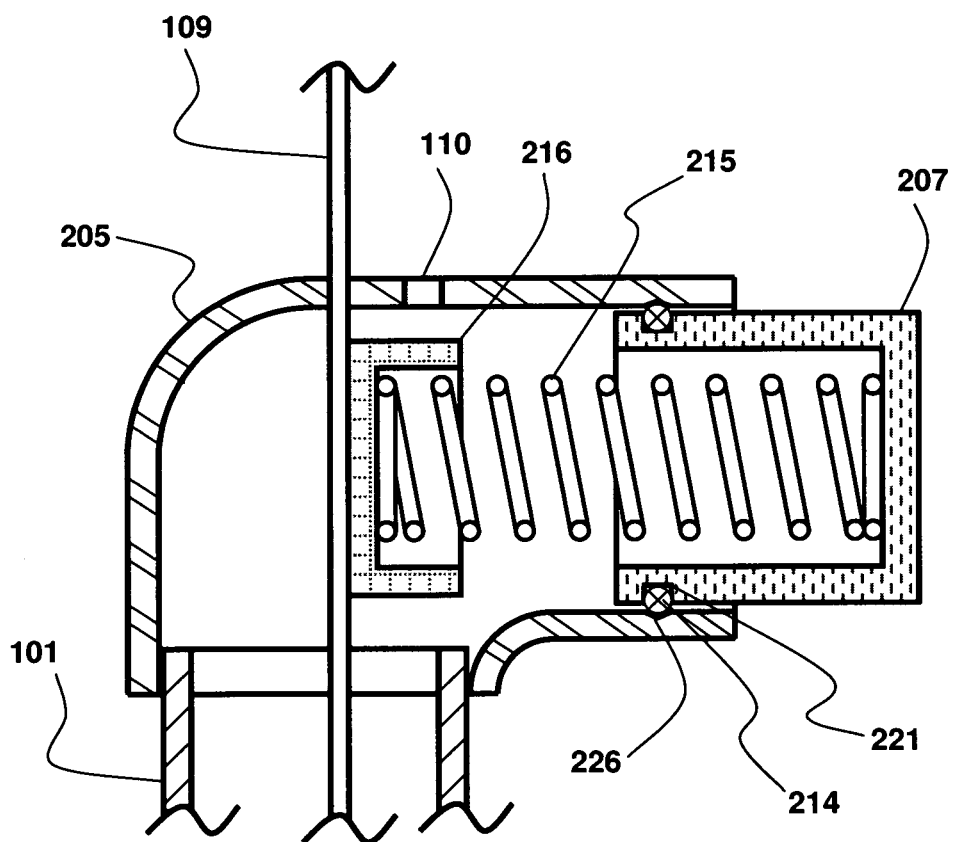


Fig. 9

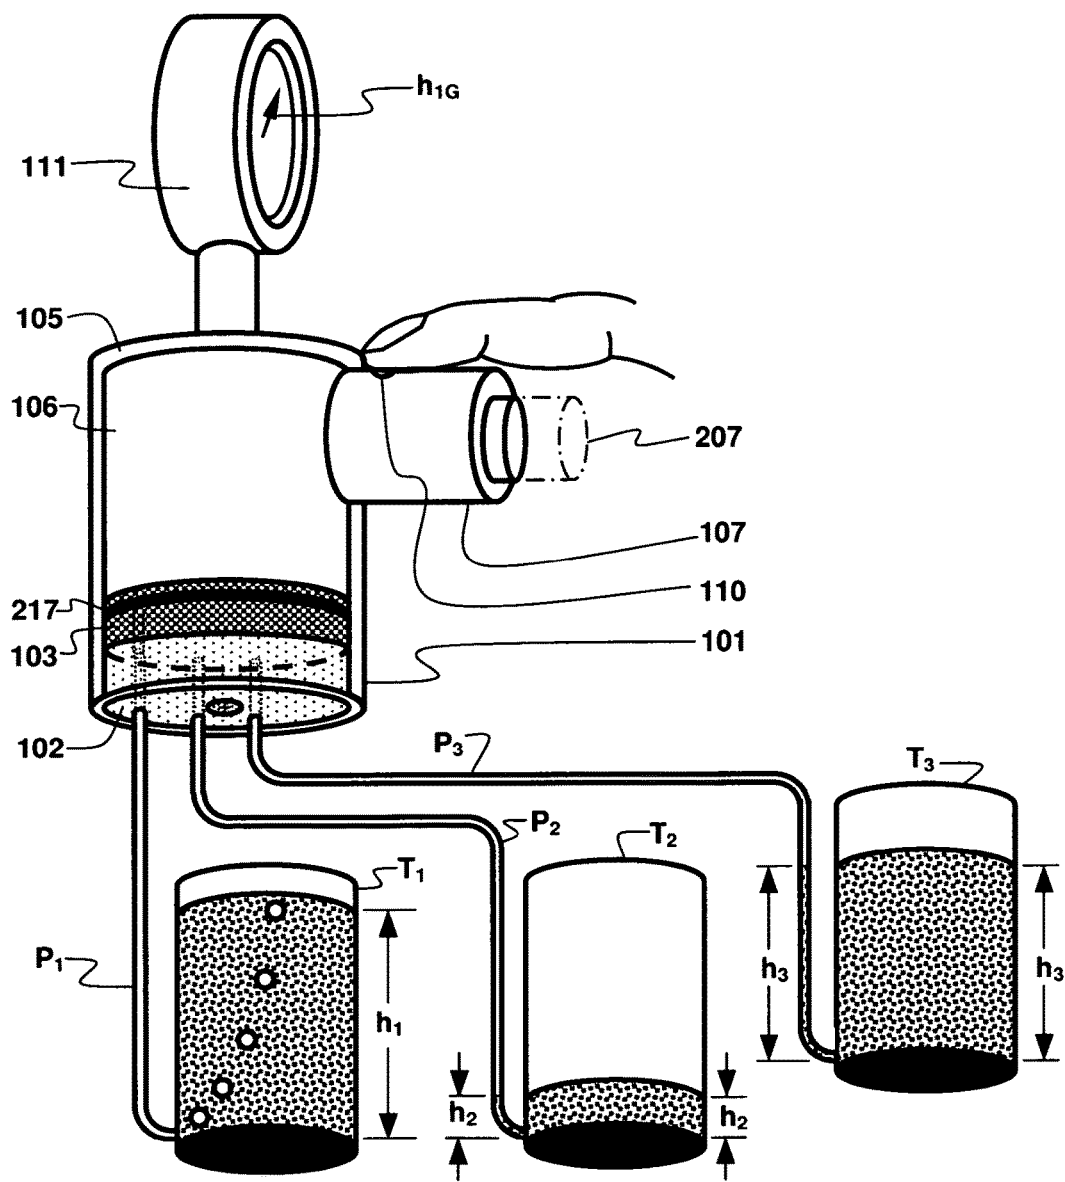


Fig. 10

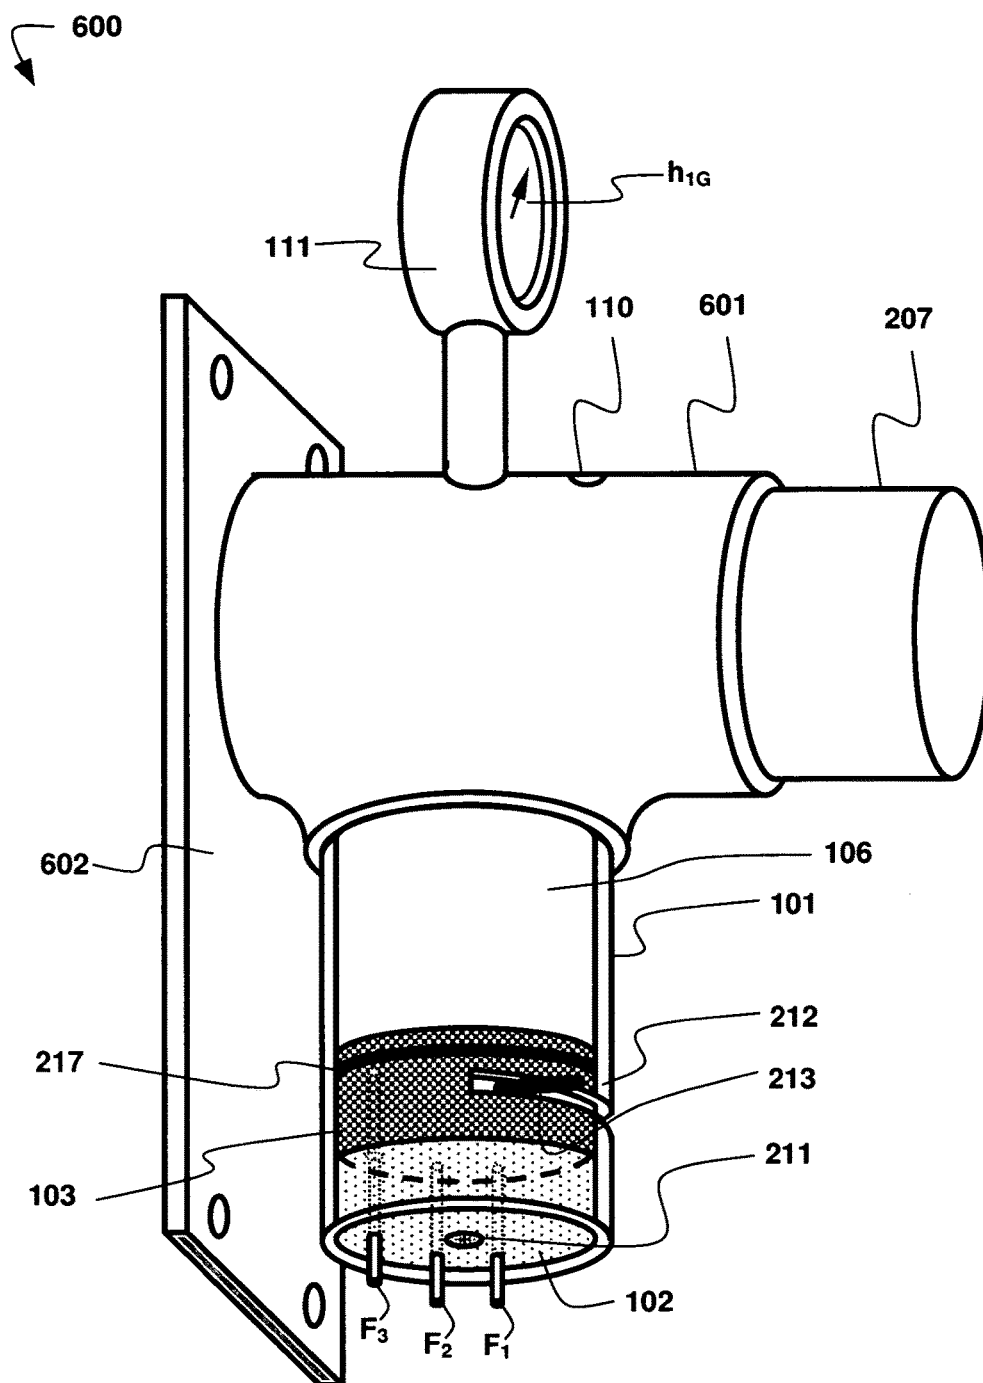


Fig. 11

1

ROTARY VALVE MULTI-TANK INDIRECT LIQUID LEVEL MEASUREMENT SYSTEM AND METHOD FOR WASTEWATER TANKS IN A RECREATIONAL VEHICLE

This application claims priority of application Ser. No. 13/573,541 filed Sep. 21, 2012, the entire contents of which are incorporated herein by reference.

BACKGROUND

This disclosure relates to the measurement of liquid levels in recreational vehicle wastewater holding tanks.

Many recreational vehicles, such as campers, trailers, fifth wheelers, and motor homes, have one or more tanks for storing the effluent or wastewater originating in the toilet, sink, or shower. These tanks are typically called black water or gray water tanks. The effluent stored in black water and gray water tanks can easily clog or render inoperable a liquid level measurement apparatus or sensors in direct contact with the wastewater. Examples of typical direct wastewater measurement devices are ones that use conductance, capacitance, floats, or other direct means for measuring the liquid in a tank. Despite the numerous cleaning methods and chemicals that have been developed, many of the existing wastewater level measuring methods and systems can fail within several weeks, resulting in the owner of a recreational vehicle draining the wastewater tank or tanks too frequently or running the risk of a tank overflow.

A typical modern recreational vehicle has a plurality of wastewater holding tanks. There are normally separate tanks for black water (human waste from the toilet) and gray water (waste water from the kitchen sink). There may be a second gray water tank for effluent from a shower.

Indirect liquid level measurement systems exist. One example is U.S. Pat. No. 7,389,688 by John Vander Horst. These devices work, but it was desired to make a simpler purely mechanical device that requires no transducers and is capable of measuring the liquid level in multiple tanks using a single gage.

BRIEF DESCRIPTION OF THE DRAWINGS

The present disclosure is described in conjunction with the appended figures in which:

FIG. 1 shows the principle of operation and the prior art;

FIG. 2 shows a rotary valve indirect liquid level-measuring device connected to a plurality of wastewater tanks;

FIG. 3 shows an embodiment of a transducer-less rotary valve multi-tank indirect liquid level-measuring device;

FIG. 4 is an exploded view of the device of FIG. 3;

FIG. 5a is a top view of the connection disk of FIG. 3 and FIG. 4;

FIG. 5b is a side view of the connection disk of FIG. 3 and FIG. 4;

FIG. 5c is a bottom view of the connection disk of FIG. 3 and FIG. 4;

FIG. 6a is a side view of the selection disk of FIG. 3 and FIG. 4;

FIG. 6b is a bottom view of the selection disk of FIG. 3 and FIG. 4;

FIG. 7a is a front view of the device of FIG. 3 mounted to a wall;

FIG. 7b is a side view of the device of FIG. 3 mounted to a wall;

FIG. 7c is a bottom view of the device of FIG. 3 mounted to a wall;

2

FIG. 8 shows section A-A of FIG. 7a;

FIG. 9 shows section B-B of FIG. 7a;

FIG. 10 shows an alternate embodiment rotary valve indirect liquid-level measuring device connected to a plurality of wastewater tanks; and

FIG. 11 shows a variant of the alternate embodiment rotary valve indirect liquid-level measuring device of FIG. 10 that further includes a mounting plate.

It should be understood that the drawings are not necessarily to scale. In certain instances, details that are not necessary for an understanding of the invention or that render other details difficult to perceive may have been omitted. It should be understood that the invention is not necessarily limited to the particular embodiments illustrated herein.

DETAILED DESCRIPTION

The ensuing description provides preferred exemplary embodiment(s) only, and is not intended to limit the scope, applicability or configuration of the disclosure. Rather, the ensuing description of the preferred exemplary embodiment(s) will provide those skilled in the art with an enabling description for implementing a preferred exemplary embodiment. It should be understood that various changes could be made in the function and arrangement of elements without departing from the spirit and scope as set forth in the appended claims.

Specific details are given in the following description to provide a thorough understanding of the embodiments. However, it will be understood by one of ordinary skill in the art that the embodiments may be practiced without these specific details. For example, circuits may be shown in block diagrams in order not to obscure the embodiments in unnecessary detail. In other instances, well-known circuits, processes, algorithms, structures, and techniques may be shown without unnecessary detail in order to avoid obscuring the embodiments.

In one embodiment, the present disclosure provides a device suitable for use with one or more wastewater holding tanks of a recreational vehicle. Wastewater holding tanks are typically located downstream of a toilet, sink, shower, or any other place where water is used to clean something or where water is combined with other fluids or solids. In addition to recreational vehicles, vehicle wastewater holding tanks can be used in other transportable or moving applications such as boats, trains, buses, aircraft, or portable lavatories.

This disclosure discusses transducers and the fact that embodiments of the present invention can be made without using a transducer (i.e. transducer-less). For purposes of this disclosure, a transducer is defined as a device that converts one form of energy to another, where energy types include electrical, mechanical, electromagnetic (including light), chemical, acoustic, or thermal energy. Therefore, an example of a transducer-less device would be one that does not rely on any conversion from mechanical energy to electrical, electromagnetic, chemical, acoustic, or thermal energy.

One embodiment of the present invention relies on the principle that the height of a liquid in a tank can be measured at a distance from such tank by measuring the pressure of a gas induced above the surface of an indicating liquid contained in a suitable gage reservoir, the excess gas being lead by a pipe or tube from the top of the gage reservoir to a point within and near the bottom of the distant tank, so that the pressure on the indicating liquid surface is proportional to the depth of the liquid in the distant tank. This principle is

understood in the prior art and is illustrated by FIG. 1 in which a pump 107 pressurizes the air 106 that is part of a sealable vessel 99 that serves as a gage reservoir. This pressurized air 106 has two places to go. It can push the indicator liquid 104 up a manometer tube 109 and it can push air down a pipe P_1 until excess air escapes from the distant tank T_1 . If the liquid in the tank T_1 and the indicator liquid 104 have the same density, then the height h_1 of the liquid in the manometer tube 109 as measured from the top of the indicating liquid 104 will be the same as the height h_1 of the liquid in tank T_1 above the inlet of the pipe P_1 in the tank T_1 . Note that the pressure reading does not change with the relative vertical position of the tank T_1 and sealable vessel 99. In one embodiment, the present invention applies this principle described in FIG. 1 to an easy-to-fabricate and easy-to-use transducer-less device for measuring the level of multiple wastewater tanks in a vehicle (such as a recreational vehicle) or in a portable application (such as a portable lavatory).

FIG. 2 shows a system comprising an embodiment of a rotary valve multi-tank indirect liquid level-measuring device and a plurality of wastewater tanks. Specifically shown are three tanks, labeled T_1 , T_2 , and T_3 , connected with three pipes P_1 , P_2 , and P_3 , respectively, to the measuring device, which comprises all of the other elements shown in FIG. 2. Note that in a typical recreational vehicle application the tanks T_1 , T_2 , and T_3 , will generally be larger, flatter, and more distant from the measuring device than the relative scale of the tanks, pipes, and device depicted in FIG. 2. One end of the pipes P_1 , P_2 , and P_3 are connected to either the bottom of the tanks T_1 , T_2 , and T_3 , or to the sides of these tanks as close to their bottoms as possible, in order to read as close to the full pressure head of the liquid in the tanks. The other end of the pipes P_1 , P_2 , and P_3 are connected to a rotary valve module, which is part of the measuring device. The rotary valve module comprises a connection disk, shown at 102. The connection disk 102 is located at the base of the measuring device. The pipes P_1 , P_2 , and P_3 are typically made of tubing. This tubing can be flexible PVC, it can be some other kind of a flexible or rigid plastic, or it can be some other type of piping capable of being understood by anyone skilled in the art. The tubing may be any length or diameter. However, for performance reasons, one would like to have tubing that has a relatively small internal diameter as this reduces the displacement required by the pump. The lengths of the pipes needed for using a gage of this type in a recreational vehicle can be a minimum of 20 feet.

Also referring to FIG. 2, in one embodiment the rotary valve module of the indirect liquid-level measuring device comprises a cylindrical tube 101, the connection disk 102, a selection disk 103, and a selection disk o-ring 217, all of which are axially aligned with each other. In addition to these rotary valve module components, the rotary valve multi-tank indirect liquid level measuring device comprises an end cap 105, the pressurization source 107, a pressurization tube 108, and a manometer tube 109. The enclosed space in the cylindrical tube 101 between the selection disk 103 and the end cap 105 may be partially filled with the indicator liquid 104 and the multi-tank indirect liquid-level measuring device is oriented so that the remaining volume of the enclosed space between the selection disk 103 and the end cap 105 can serve as the body of a sealable vessel, all elements being pneumatically coupled to the pressurized air 106. Note that the selection disk 103 sits between the enclosed volume or reservoir and the connection disk 102, and on the opposite side of the connection disk 102 than the

connections to the pipes P_1 , P_2 , and P_3 . The indicator liquid 104 can be any liquid understood by someone skilled in the art of manometers, examples of which include mercury and water. If water is to be used, a colorant may be added to make the height of the water easier to see in the manometer tube 109. The pressurization source 107 generates the pressurized air 106 that makes the device work. Note that the indicator liquid 104 is typically not necessarily part of the device, but will be added by the user during the installation process.

Further referring to FIG. 2, the pipes P_1 , P_2 , and P_3 , are attached to the connection disk 102 at three points on one end of the cylindrical disk with each of the attachment points being located the same distance from the central vertical axis of the connection disk. The attachment points comprise axial holes through the connection disk that allow air to pass through the connection disk to one of the pipes P_1 , P_2 , and P_3 , when a pressurization tube 108 mounted in the selection disk 103 is rotated to align with the hole in the connection disk 102 opposite that pipe. The selection disk 103 is assembled into the cylindrical tube in a way that allows an operator to rotate the selection disk 103 inside the cylindrical tube. The details of one implementation will be explained later in this disclosure. The pressurization tube 108 that is mounted in the selection disk extends through the indicator liquid 104 to the pressurized air 106.

Additionally FIG. 2 shows the end cap 105 that helps to seal the pressurized air 106 into an enclosed space. The end cap 105 can either be an integral part of the cylindrical tube 101 as illustrated in FIG. 2, or it can be a separate component that is attached to the cylindrical tube 105. The pressurization source 107 shown in FIG. 2, can be a simple single-stroke hand-operated push button positive displacement pump cylinder 207 that, when depressed, pressurizes the air 106. A user's thumb would typically press this push button. There is also a pressure relief hole, shown at 110, which can be sealed by a user's finger, shown at 112 while pressing the push button. Examples of manual (i.e. hand-operated) positive displacement pumps include, but are not limited to piston pumps, pumps that use a bulb (such as a turkey baster), other kinds of squeeze pumps, bellows pumps, and diaphragm pumps. The pump also doesn't need to be limited to one that is operated manually by the operator's hands. Other examples of manual human-operated pumps can include pumps in which the user blows into a tube, presses a footpad, or uses an arm or leg action to crank a handle.

FIG. 2 also illustrates the operation of the system when the first tank T_1 has been selected and has its liquid level measured. The first pipe P_1 has been selected and pneumatically connected to the volume of air in the device through the pressurization tube 108. The pump button 207 has been depressed from its relaxed state while a pressure relief hole 110 has been manually sealed by a user's finger, causing air to push through the first pipe P_1 and create air bubbles in the first tank T_1 as excess air escapes. The pressurized air 106 also forces water up the manometer tube 109 making the reading of the pressure head h_1 equal to the vertical height of the liquid in the first tank T_1 from the point at which the first pipe P_1 enters the first tank T_1 . If the indicator liquid 104 and the liquid in the first tank are both water, or are both liquids having the same densities, the vertical height of the indicator liquid in the manometer tube and the vertical height of the water in the first tank T_1 from the point of the inlet of the first pipe P_1 will both be the same as shown by the two h_1 's in FIG. 2. If liquids of different densities are used, there will be a ratio in the two heights that is directly proportional to the ratio of the densities of the two liquids.

5

Note that the second pipe P_2 and third pipe P_3 have liquid in them to the same height as the liquid that is in the respective tanks T_2 and T_3 because these pipes have not been connected to the pressurized air **106** by the rotary valve that is part of the multi-tank liquid-level measuring device. The volume of liquid in these two pipes h_2 and h_3 , respectively, must be purged if the liquid level were to be measured in these tanks. To minimize the amount of liquid that must be pumped from these pipes it is desirable to minimize the inside diameter of the pipes and to run the pipes directly vertically until they are a sufficient distance above the highest liquid level that could be in any of these tanks. As a reference, the system shown in FIG. 2 has been implemented using pipe that has an inside diameter of $\frac{3}{32}$ inch. Other inside diameters such as $\frac{1}{16}$ inch and $\frac{1}{8}$ inch could also be used for a typical recreational vehicle. If a $\frac{3}{32}$ inch inside diameter pipe is used and the length of pipe is 15 inches before it is above the tank, a displacement of 0.1 cubic inches would be required to purge the liquid from the pipe. The method of attachment and sealing of the pipes P_1 , P_2 , and P_3 to the tanks T_1 , T_2 , and T_3 and to the connection disk **102** of the measuring device can be accomplished via a mechanical fitting, through ultrasonic bonding, through plastic welding, or through some other means capable of being understood by someone skilled in the art.

Note that the entire indirect liquid level-measuring device shown in FIG. 2 is transducer-less, in that it uses only mechanical energy (in the form of pressure) to provide a reading of liquid levels in a plurality of recreational vehicle wastewater tanks, without converting this to an other form of energy such as electrical, electromagnetic, chemical, acoustic, or thermal energy.

Further referring to FIG. 2 the operation of a push button positive displacement pump can cause the indicating liquid in the manometer tube **109** to overshoot. To prevent this, a flow damper can be placed into the manometer tube **109** close to the point at which the indicator liquid **104** enters the manometer tube **109**. Placing a $\frac{1}{8}$ -inch long plug into the manometer tube **109** at the end close to the inlet for the indicator liquid **104** has been found to work well as a flow damper.

FIG. 3 and FIG. 4 show another embodiment of a rotary valve indirect liquid level-measuring device at **200**. The embodiment shown in FIG. 3 and FIG. 4 is similar to the device shown in FIG. 2, but the tanks and pipes have been removed to reveal more detail of the device. In the device shown in FIG. 3 the end cap (**105** in FIG. 2) and the housing for the pressurization source (**107** in FIG. 2) have been integrated into a single end cap housing, shown at **205**. In this embodiment, the end cap housing **205** is made from a standard 90-degree polyvinyl chloride (PVC) elbow joint that can be obtained at hardware stores. In one specific embodiment, the end cap housing is a 90-degree elbow joint for standard $\frac{3}{4}$ inch PVC pipe. This means the inside diameter of the elbow joint is 1.050 inches because $\frac{3}{4}$ inch PVC pipe has an inside diameter of approximately $\frac{3}{4}$ inch and a wall thickness of approximately 0.15 inches. In the embodiment shown in FIG. 3, one leg of the elbow joint has been reduced in length to fit the cylindrical tube, shown at **101**. There is a hole drilled into the elbow for the manometer tube, shown at **109**. In the embodiment shown, the manometer tube is made of $\frac{1}{4}$ inch outside diameter rigid acrylic tubing with a $\frac{1}{16}$ inch wall thickness giving an inside diameter of $\frac{1}{8}$ inch. The manometer tube **109** has lines marked on it to show the height of the indicator liquid. In the embodiment shown, the manometer tube hole is drilled so the manometer tube **109** has its one end centered in the

6

center of the indicator liquid, shown at **104**. The manometer tube hole and the fitting of the manometer tube into this hole must be done in a way that provides a good seal for the pressurized air **106**. This can be done using any technique capable of being understood by someone skilled in the art. One technique is to use a fitting made of pliable PVC tubing that provides a hermetic seal. There are also adhesives that can be used to provide such a hermetic seal.

Further referring to FIG. 3 and FIG. 4, there is a pressure relief hole (or vent) drilled into the elbow, which is shown at **110**. This hole serves the same function as the equivalent hole shown in FIG. 2. A pump button, shown at **207** is used to pressurize the air **106**. More details of the pump button **207** and other pump elements will be described later in this disclosure. The exact configuration, materials, and manufacturing process for the end cap housing **205** can be anything capable of being understood by someone skilled in the art.

FIG. 3 and FIG. 4 also show the cylindrical tube at **101**. The cylindrical tube **101** in this embodiment is made from 0.80 inch inside diameter, 1.05 inch outside diameter transparent PVC pipe that has been cut to a length of approximately 2.5 inches. The cylindrical tube **101** has a cylindrical tube slot, shown at **212**, cut into it. In the embodiment shown, the cylindrical tube slot **212** is approximately 0.10 inch wide; it is located about 0.70 inches from one end (the bottom) of the cylindrical tube; and it extends approximately 90 degrees around the circumference of the cylindrical tube **101**. The end of the cylindrical tube **101** furthest from the cylindrical tube slot **212** is attached and sealed to the end cap pump housing **205** using any technique capable of being understood by someone skilled in the art. One example of an attachment and sealing technique for the cylindrical tube **101** and end cap housing **205** is the use of an adhesive.

Further referring to the embodiment shown in FIG. 3 and FIG. 4, the selection disk, shown at **103** and the connection disk, shown at **102** are attached to one another using a mechanical fastener, which in this case is an assembly screw, shown at **211**. The assembly screw **211** is axially centered in the selection disk **103** and connection disk **102**. An assembly spring **225** creates a constant force between the co-axially located selection disk **103** and connection disk **102**, while still allowing the two disks to rotate relative to one another. In the embodiment shown in FIG. 3 and FIG. 4, the connection disk **102** has three fittings, shown at F_1 , F_2 , and F_3 that allow pipes or tubes, shown as P_1 , P_2 , and P_3 in FIG. 2, from the tanks shown as T_1 , T_2 , and T_3 in FIG. 1, to attach to the liquid level measuring device **200**. These fittings F_1 , F_2 , and F_3 can also be called connection elements. In the embodiment shown in FIG. 3 and FIG. 4, these fittings F_1 , F_2 , and F_3 are pressed into axial through holes in the connection disk **102**. By rotating the selection disk **103** inside the cylindrical tube **101** and relative to the connection disk **102**, the user can exclusively select which of the three fittings F_1 , F_2 , or F_3 in the connection disk **102** lines up with an axial passage in the selection disk **103**, which is then connected to the pressurized air **106**. The outside diameters of the connection disk **102** and the selection disk **103** are designed to allow these two disks to fit snugly into the cylindrical tube **101**. There is an o-ring groove around the circumference of the selection disk **103** near the end of the selection disk **103** that is opposite the connection disk **102**. This groove has an o-ring, shown at **217**, placed in it to provide a seal between the pressurized air **106** and outside atmosphere when the selection disk and connection disk are placed inside the cylindrical tube **101**. The pressurization tube, shown at **108**, is placed into the hole in the selection

7

disk. The pressurization tube **108** extends out the end of the selection disk **103** that is opposite the connection disk **102** and extends through the indicator liquid, shown at **104**, to the pressurized air **106**.

FIG. **3** and FIG. **4** also show how the selection disk **103** can be rotated when the device **200** has been assembled. There is a hole in the selection disk **103** that lines up with the cylindrical tube slot **212** in the cylindrical tube **101**. In the embodiment shown in FIG. **2**, a selection disk rotation pin, shown at **213**, is pressed into this hole in the selection disk **103**. The connection disk **102** is fixed so that it cannot move relative to the cylindrical housing **101**, which can be accomplished using any method capable of being understood by someone skilled in the art, such as the use of a pin that goes radially through the cylindrical housing **101** and into the connection disk **102**. The selection disk **103** will then rotate relative to the connection disk when a user rotates the selection disk rotation pin **213** relative to the cylindrical housing **101**. A rotary valve is created through the combination of the cylindrical selection disk **103** placed in a cylindrical tube **101** with a selection disk rotation pin **213** that is accessed through the cylindrical tube slot **212**.

Further referring to FIG. **4**, the pump button **207** includes an o-ring groove, shown at **221**, into which a pump button o-ring, shown at **214**, can be placed. The pump button o-ring **214** helps ensure that there is a good seal for maintaining the pressurized air (**106** in FIG. **2** and FIG. **3**). There is a coil spring, shown at **215**, which becomes compressed when the pump button **207** is pressed. One end of the coil spring **215** is retained inside the pump button **207**. A spring support, shown at **216**, retains the other end of the coil spring **215**. When the device shown in FIG. **4** is assembled, the spring support **216** rests against the manometer tube, shown at **109**. The pump button **207**, pump button o-ring **214**, coil spring **215**, and spring support **216** can be made of any materials capable of being understood by anyone skilled in the art. For example, the pump button **207** can be made of machined or molded plastic, the pump button o-ring **214** can be a commercially purchased rubber o-ring, the coil spring **215** can be a commercially purchased plastic or steel spring, and the spring support **216** can be molded or machined ring or cap capable of retaining the coil spring.

FIG. **4** also shows how the manometer tube, shown at **109**, and the cylindrical tube, shown at **101**, fit into the end cap pump housing **205**. The assembly spring, shown at **225**, provides a compressive force to ensure that the connection disk **102** and selection disk **103** are always pressed together. A connection tube o-ring, shown at **218**, is placed into a selection tube o-ring housing, shown at **223**, before the selection disk **103** and connection disk **102** are fastened together. A stop pin, shown at **219**, is also placed into a hole in the connection disk before the selection disk **103** and connection disk **102** are fastened together. One end of the stop pin **219** fits into a slot, shown at **220** in the selection disk to limit the amount of rotation between the connection disk **102** and selection disk **103** to the three through holes in the connection disk **102** that line up with the three fittings, shown at F_1 , F_2 , and F_3 , that are pressed into the connection disk **102**. A pressurization tube, shown at **108** is pressed into the selection disk **103**. A selection disk o-ring, shown at **217**, is placed into a selection disk o-ring groove, shown at **222**.

Further referring to FIG. **4**, the completed subassembly comprising the connection disk **102**, the selection disk **103**, and various attachments can be placed into the cylindrical tube **101** once the operations described in the previous paragraph have been completed. The completed selection disk+assembly disk subassembly is pushed in far enough so

8

that the selection disk rotation pin hole, shown at **224**, is in the cylindrical tube slot, shown at **212**, allowing the selection disk rotation pin, shown at **213**, to be placed in the selection disk rotation pin hole **224**.

Referring to FIG. **3** and FIG. **4**, the easiest way to fill the indirect liquid level measuring device with an indicator liquid, shown at **104** in FIG. **3**, is to remove the pump button **207** and pump button o-ring **214** in FIG. **3**, as well as the coil spring **215** in FIG. **4**, and spring support **216** in FIG. **4** from the end cap pump housing **205**. The user can then pour the indicator liquid **104** in FIG. **3** directly into the vessel.

FIG. **5a** is a top view of the connection disk **102**. FIG. **5b** is a side view of the connection disk **102**. FIG. **5c** is a bottom view of the connection disk **102**. These views illustrate the fitting holes, shown at **401**, which connect to the three fittings (F_1 , F_2 , and F_3 in FIG. **4**). Both the fittings (F_1 , F_2 , and F_3 in FIG. **4**) and the fitting holes **401** can be called connection elements that provide a pneumatic connection between the wastewater tanks (T_1 , T_2 , and T_3 in FIG. **2**) and the measuring device. The fitting holes **401** are axial through holes in the connection disk **102** and all fitting holes **401** are located at the same fixed radial distance from the central axis of the connection disk. FIG. **5a**, FIG. **5b**, and FIG. **5c** also illustrate the assembly screw hole, shown at **402**, that houses the assembly screw (**211** in FIG. **4**) and assembly spring (**225** in FIG. **4**). The assembly screw hole **402** is located on the central axis of the connection disk **102**. Additionally, FIG. **5a**, FIG. **5b**, and FIG. **5c** illustrate the stop pin hole, shown at **403**, which houses the opposite end of the stop pin (**219** in FIG. **4**). There is also an anti-rotation pin hole shown at **404**. The anti-rotation pin hole **404** is used to hold an anti-rotation pin, that will be further described with reference to FIG. **8**.

FIG. **6a** shows a side view of the selection disk at **103**. FIG. **6b** shows a bottom view of the selection disk at **103**. FIG. **6a** and FIG. **6b** depict the o-ring groove at **222**. FIG. **6a** and FIG. **6b** depict the connection tube o-ring housing at **223**. The connection tube o-ring housing is the bottom of the selection disk axial passage shown at **227** that goes from one end of the selection disk **103** to the other. The selection disk axial passage **227** is at the same radial distance from the central axis of the selection disk as the distance between the central axis and the centers of the axial through holes in the connection disk shown in FIG. **5a**, FIG. **5b**, and FIG. **5c**. FIG. **6a** and FIG. **6b** depict the selection disk rotation pin hole at **224**. FIG. **6a** and FIG. **6b** depict the assembly screw hole at **502**. The selection disk rotation pin hole **224** is a radial hole to hold the selection disk rotation pin, shown at **213** in FIG. **4** in a radial orientation relative to the central axis of the selection disk **103**.

FIG. **7a**, FIG. **7b**, and FIG. **7c** provide three orthogonal views of a liquid level-measuring device mounted on the wall of a recreational vehicle. In these three views, the wall of the recreational vehicle is shown at **301**. The device is mounted using a mounting sleeve, shown at **302**. The mounting sleeve **301** surrounds the device near the bottom of the device. This sleeve has a slot, shown at **305**, which allows the sleeve **302** to fit snugly around the device regardless of tolerances of the device and the sleeve **302**. The sleeve is surrounded by a mounting bracket, shown at **303**, which is attached to the wall, shown at **301**, using two mounting screws, shown at **304**.

FIG. **7b** also shows how an operator's index finger might be used to seal the pressure relief hole **110**. Typically, the thumb of the operator's other hand (not shown) would

simultaneously the press the pump button **207** to make a liquid level reading using the embodiment of the device shown.

FIG. **8** is section A-A of FIG. **7a** that shows the wall of the recreational vehicle at **301**. The mounting sleeve is shown at **302**. There is a groove, shown at **306**, in the mounting sleeve **302**. This groove **306** facilitates the placement of an anti-rotation pin, shown at **307**, that goes through the wall of the cylindrical tube, shown at **101**, to prevent the connection disk, shown at **102**, from rotating relative to the cylindrical tube **101**. Means other than the anti-rotation pin **307** can be used to fixedly and securely attach the connection disk to the cylindrical tube including screws, adhesives, and clamps or any other attachment technique capable of being understood by anyone skilled in the art. The mounting bracket, shown at **303**, goes over the mounting sleeve **302**. One end of the stop pin, shown at **219**, is pressed into the connection disk **102**. The selection disk rotation pin, shown at **213**, is pressed into the selection disk **203** and is accessible to the user through a slot in the cylindrical tube **101**.

Further referring to FIG. **8**, the assembly screw, shown at **211**, compresses the assembly spring, shown at **225**, to provide a pressure that keeps the connection disk **102** pressed against the selection disk **103**. This ensures that the connection tube o-ring, shown at **218**, provides a proper seal. This seal is needed to ensure that the pressurized air delivered by the fitting, shown at **F₂**, is transmitted to the pressurization tube, shown at **108** without leakage.

FIG. **9** is section B-B of FIG. **7a**. This shows the end cap pump housing **205** and pressure relief hole **110**. It also shows how the spring cap **216** rests against the manometer tube **109**. It further shows the pump spring **215** being compressed between the spring cap **216** and pump button **207**. The pump button o-ring **214** rides in the pump button o-ring groove **221**. There is also a small ring machined out of the end cap pump housing **205** that helps serve as a pump button o-ring stop shown at **226**. Also shown at **101** is a partial section of the cylindrical tube. For reference purposes, one embodiment of the design shown in FIG. **9** has an end cap pump housing inside diameter of approximately 1.05 inches and a pump button stroke of about 0.5 inches giving a displacement in excess of 0.4 cubic inches in a single stroke. The following is a list of minimum pump displacements (Minimum Displacement) needed assuming various choices of pipe inside diameters (Pipe IDs for pipes shown **P₁**, **P₂**, and **P₃** in FIG. **2**), manometer tube (**209** in FIG. **2**) inside diameters (Tube IDs), and tank heights (**h₁**, **h₂**, and **h₃** in FIG. **2**, heights in list below) that are suitable for various typical recreational vehicles:

Pipe ID	Tube ID	Height	Minimum Displacement
1/16"	3/32"	5 inches	0.05 cubic inches
1/16"	3/32"	10 inches	0.10 cubic inches
1/16"	3/32"	15 inches	0.15 cubic inches
1/16"	3/32"	20 inches	0.20 cubic inches
1/16"	3/32"	25 inches	0.25 cubic inches
3/32"	1/8"	5 inches	0.10 cubic inches
3/32"	1/8"	10 inches	0.20 cubic inches
3/32"	1/8"	15 inches	0.30 cubic inches
3/32"	1/8"	20 inches	0.40 cubic inches
3/32"	1/8"	25 inches	0.50 cubic inches

FIG. **10** illustrates and alternate embodiment of a rotary valve multi-tank indirect liquid level measurement device attached to a plurality of wastewater tanks. This alternate device comprises the same cylindrical tube **101**, connection disk **102**, selection disk **103**, selection disk o-ring **217**, end

cap **105**, pressurization source **107**, and pressure relief hole **110**, to create a sealable reservoir (or vessel) for holding pressurized air **106** that were shown with reference to FIG. **2** and FIG. **3**. In FIG. **10**, the pressurization source **107** is a manual piston pump that is actuated with a having a pump button (or push button) shown at **207**. The rotary valve multi-tank indirect liquid level measurement device does not contain an indicator liquid (**104** in FIG. **2**) and does not need the pressurization tube (**108** in FIG. **2**). Because there is no liquid in the reservoir, this alternate rotary value multi-tank indirect liquid level measurement device is not sensitive to orientation, so the central axis of the cylindrical tube does not necessarily need to be vertical. It could also be horizontal. In this alternate device, the manometer tube, **109** in FIG. **2** and FIG. **3**, and related elements have been replaced with a bourdon tube pressure gage, shown at **111**. The bourdon tube pressure gage **111** comprises a rotary dial that indicates the level of liquid in the recreational vehicle wastewater tank as the a pressure, shown at **h_{1G}**. The bourdon tube pressure gage reading **h_{1G}** is a measure of the height of the liquid **h₁** in the first tank **T₁** because the pressure of the pressurized air **106** is communicated through the axial passage in the selection disk **103** that is aligned with the axial through hole in the connection disk **102** that is connected to the first pipe **P₁**. FIG. **10** also shows the second tank **T₂**, the third tank **T₃**, the second pipe **P₂**, the third pipe **P₃**, the second pressure head **h₂**, the third pressure head **h₃** are the same as what was shown in FIG. **2**.

FIG. **11** shows a variation of the alternate embodiment of a rotary valve multi-tank indirect liquid level measurement device of FIG. **10**. This variation of the device is shown at **600**. In the variation shown in FIG. **11**, the sealable vessel comprises a 3/4-inch PVC (polyvinyl chloride) T-connector, shown at **601**, that has the manual piston pump button **207** mounted in one of the pipe adapters in the front of the device **600** in a horizontal orientation. The cylindrical tube is **101** mounted on the second of the pipe adapters downwards in a vertical orientation and an end cap mounting plate **602** seals off the third of the pipe adapters, which is located at the rear. This third pipe adapter is in a horizontal orientation. In the variation of the alternate embodiment shown, the end cap mounting plate **601** is a molded PVC part that has a plug that can be bonded into the third pipe adapter of the T-connector **601**. The end cap mounting plate **601** has four holes that are designed to facilitate attachment of the device to a wall of the recreational vehicle that has the wastewater tanks. Other parts of this variation of the alternate embodiment device **600** are similar to the items shown in FIG. **3**. This includes the pressure relief hole (or vent) **110**, the connection disk **102**, the selection disk **103**, the pressurized air **106**, the assembly screw **211**, cylindrical tube slot **212**, the selection disk rotation pin **213**, the selection disk o-ring and the three fittings **F₁**, **F₂**, and **F₃**.

A number of variations and modifications of the disclosed embodiments can also be used. The principles described here can also be used for in applications other than recreational vehicles such as bioreactors, etc. While the principles of the disclosure have been described above in connection with specific apparatuses and methods, it is to be clearly understood that this description is made only by way of example and not as limitation on the scope of the disclosure.

What is claimed is:

1. An apparatus for indicating the depth of liquid in a plurality of recreational vehicle wastewater tanks comprising:

11

a sealable reservoir for holding pressurized air;
 a manual piston pump that pressurizes the air in the reservoir;
 a cylindrical tube pneumatically coupled to the sealable reservoir;
 a cylindrical connection disk that snugly fits inside the cylindrical tube and is fixedly attached to the cylindrical tube, the connection disk comprising:
 a plurality of axial through holes located at a fixed radius from the connection disk central axis; and
 a connection element in one end of each axial through hole wherein each connection element provides a connection to a pipe that communicates with liquid in the bottom of one of the recreational vehicle wastewater tanks to be gaged;
 a cylindrical selection disk that snugly fits inside the cylindrical tube wherein:
 the selection disk is axially aligned and adjacent to the connection disk on the opposite side of the connection disk from the connection elements;
 the selection disk is located between the connection disk and the reservoir;
 the selection disk comprises an axial passage that is located at the fixed radius from the common central axis of the selection disk and connection disk; and
 the selection disk is rotatable in the cylindrical tube to provide selective and exclusive transmission of pressurized air from the reservoir to the recreational vehicle wastewater tanks; and
 a bourdon tube pressure gage that senses the pressure difference between the pressurized air and atmospheric pressure and displays the pressure difference to indicate the depth of the liquid in one of the recreational vehicle wastewater tanks.

2. The apparatus of claim 1 wherein:
 the common central axis of the selection disk and the connection disk is vertical;
 the selection disk further comprises a selection disk o-ring groove;
 the apparatus further comprises an o-ring located in the selection disk o-ring groove that seals the pressurized air in the reservoir from atmospheric pressure;
 the selection disk rotates in the cylindrical tube when a radial pin is manually moved, wherein the radial pin fits into a slot in the cylindrical tube;
 the connection disk is attached to the selection disk with a screw and a coil spring;
 the sealable reservoir is sealed by manually sealing a drilled hole in the reservoir; and
 the apparatus operates without using electrical, electromagnetic, chemical, acoustic or thermal energy.

3. The apparatus of claim 1 wherein:
 the connection elements comprise fittings for PVC tubes wherein the PVC tubes comprise an inside diameter selected from the group of $\frac{1}{16}$ inch, $\frac{3}{32}$ inch, and $\frac{1}{8}$ inch; and
 the pump is a single stroke hand pump displacing a minimum volume selected from the set of 0.05 cubic inches, 0.1 cubic inches, 0.15 cubic inches, 0.2 cubic inches, 0.25 cubic inches, 0.3 cubic inches, 0.4 cubic inches, and 0.5 cubic inches.

4. The apparatus of claim 1 wherein:
 the common central axis of the selection disk and the connection disk is vertical.

5. The apparatus of claim 1 wherein:
 the axial passage comprises a connection tube o-ring housing;

12

the apparatus further comprises an o-ring located in the connection tube o-ring housing;
 the selection disk comprises a slot; and
 the slot limits the amount of rotation of the selection disk relative to the connection disk.

6. The apparatus of claim 1 wherein:
 the reservoir comprises polyvinyl chloride.

7. The apparatus of claim 1 wherein:
 the pump further comprises a push button, an o-ring, and a coil spring.

8. The apparatus of claim 1 wherein:
 the connection element comprises a mechanical fitting.

9. The apparatus of claim 1 wherein:
 the cylindrical tube is transparent.

10. The apparatus of claim 1 wherein:
 the apparatus further comprises a mounting plate that the mounting plate comprises wall mounting holes.

11. The apparatus of claim 1 wherein:
 the apparatus does not use electrical, electromagnetic, chemical or thermal energy to indicate the depth of liquid in the plurality of recreational vehicle wastewater tanks.

12. The apparatus of claim 1 wherein:
 the connection disk is attached to the selection disk with a mechanical fastener.

13. A multi-tank wastewater level gage comprising:
 a sealable vessel for holding pressurized air;
 a pump for pressurizing the air in the vessel;
 a rotary valve pneumatically coupled to the sealable vessel wherein the rotary valve further comprises:
 a cylindrical housing;
 a cylindrical connection disk that snugly fits inside the cylindrical housing and is fixedly attached to the cylindrical housing, the connection disk comprising:
 a plurality of axial through holes located at a fixed radius from the connection disk central axis; and
 a connection element in one end of each axial through hole wherein each connection element provides a connection to a pipe that communicates with liquid in the bottom of one of the wastewater tanks to be gaged;
 a cylindrical selection disk that snugly fits inside the cylindrical housing wherein:
 the selection disk is axially aligned and adjacent to the connection disk on the opposite side of the connection disk from the connection elements;
 the selection disk is located between the connection disk and the vessel;
 the selection disk comprises an axial passage that is located at the fixed radius from the common central axis of the selection disk and connection disk; and
 the selection disk is rotatable in the cylindrical housing to provide selective and exclusive transmission of pressurized air from the vessel to one of the wastewater tanks; and
 a pressure gage that senses the pressure difference between the pressurized air and atmospheric pressure and displays the pressure difference to indicate the depth of the liquid in one of the wastewater tanks.

14. The gage of claim 13 wherein:
 the gage is used in a recreational vehicle; and
 the pump is a manual piston pump comprising a push button, an o-ring, and a coil spring.

15. The gage of claim 13 wherein:
 the pressure gage is a bourdon tube pressure gage.

13

- 16.** The gage of claim **13** wherein:
the selection disk central axis and the connection disk
central axis are vertically aligned;
the vessel comprises a $\frac{3}{4}$ inch T-connector made of
polyvinyl chloride; and
the gage further comprises an end cap mounting plate
wherein:
the mounting plate seals one of the openings of the
T-connector; and
the mounting plate comprises a feature for attachment
to a wall.
- 17.** The gage of claim **13** wherein:
the selection disk rotates in the cylindrical housing when
a radial pin is manually moved, wherein the radial pin
fits through a slot in the cylindrical housing; and
the connection disk is attached to the selection disk with
a screw and a coil spring.
- 18.** A mechanical method of displaying the level of liquids
in a plurality of remote wastewater tanks comprising the
steps of:
pressurizing a sealable vessel with pressurized air;
establishing a pneumatic connection between a selection
disk and the pressurized air;
transmitting the pressurized air through an axial passage
in the selection disk;
establishing a connection element that has a plurality of
axial through holes in a circular configuration;
connecting a first end of each axial through hole with a
pneumatic connection to the bottom of a wastewater
tank;

14

- attaching the central axis of the selection disk to the center
of the circular configuration of the connection element
on the side of the connection element opposite the
pneumatic connections to the bottoms of the wastewa-
ter tanks, wherein attaching comprises an attachment
that allows the selection disk to rotate about its central
axis;
- rotating the selection disk relative to a connection element
to align the selection disk passage with one end of one
of the axial through holes, whereby a pneumatic con-
nection is made between the pressurized air and a
wastewater tank;
- displaying the air pressure using a bourdon tube pressure
gage.
- 19.** The method of claim **18** wherein:
the wastewater tanks are located in a recreational vehicle;
the method further comprises manually sealing the seal-
able vessel by plugging a hole prior to pressurizing the
vessel;
- pressurizing comprises a manual piston pump.
- 20.** The method of claim **18** wherein:
rotating comprises manually moving a pin that protrudes
radially from the selection disk;
- connecting comprises flexible polyvinyl chloride tubing
having a maximum inside diameter of $\frac{1}{8}$ inch whereby
the total volume of air to be displaced is minimized.

* * * * *